


The feel of Real marble

1200X1800MM

FAB SURFACE

surface to shape the spaces
with its robust thickness of
9mm. It lends durability,
eventually making them strong,
functional, and versatile.

SIZE & THICKNESS

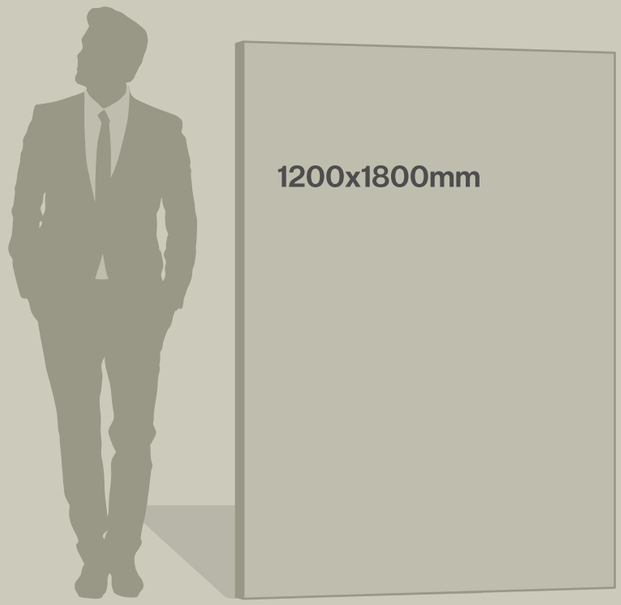

EXTENSIVE SIZE LIMITLESS APPLICATIONS

Explore ceaseless opportunities to enable a grand decor style with the extensive 1200x1800mm size of Fab Surface, offering spaces a fine aesthetics.

ADAPTABLE SIZE

The grand size of the collection is versatile on the contrary and allows one to explore decor ideas and execute them to perfection.

IMPECCABLE LAY


The variable sizes under the collection offers a seamless lay for your select spaces with less unflattering grout lines and facilitating a continuous floor and wall.

RESOURCEFUL APPLICATION

The multifarious size offers versatile application possibilities for your spaces, furniture, and other tiling needs.

TAKING CARE MADE SIMPLE

Along with the materials like water, oil, grease, etc. we have also taken care of the elements created by the environmental conditions, like algae, which makes the surface slippery. 'Protect' surface stops the formation and development of the algae and makes it an anti-algae surface. These qualities of the 'Protect' surface make it an anti-skid in the true sense.

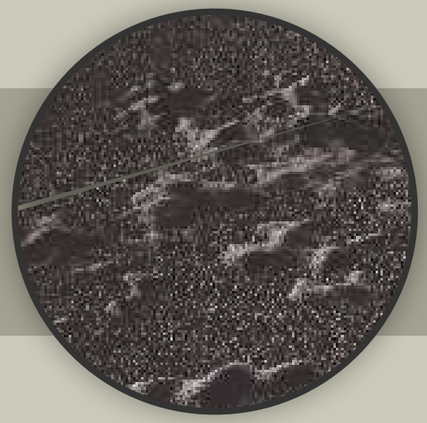

1. PROTECT SURFACE

To minimize the roughness created by the cliffs, we apply the unique micro protect-particles that cover the deep valleys creating the smoothest anti-skid surface without affecting the cliffs.



2. APPLYING THE MICRO PROTECT-PARTICLES

To create the material you need the skill of an artisan, machines and ceramic know- how, aesthetic culture and a passion for design. And you need tough and painstaking development work.



3. TRADITIONAL ANTI-SKID SURFACE

When we observe the regular anti-skid surface under a microscope, we notice higher cliffs that create valleys making the surface rough, unpleasant to touch, and diffcult to clean and maintain.

PERFECT FROM BEGINNING TO END

While our control the happenings in the world outside is quite limited. we must surely take onus of safety within out own happy place. Today, one's safety. health and wellness are amongs the greatness concerns globally, and this has given us an oppurtunity to innovte, and to come up with unique solutions that either eliminate or lessen the challenges we face each day


utilizing our latest production systems, we introduce you to a technology that removes uncertainties or doubts involving safety within your home fab surface the technology helps the product surface repel any liquid and does not allow unwanted or harmful living organisms to stay or grow, This water repellent and anti-bacterial surface created with fab surface requires the lowest maintenance efforts, keeping you from second guessing your safety indoors.





LIQUID REPELLENT
STAIN RESISTANT
SCRATCH RESISTANT
FIRE RESISTANT
RESISTANT TO UV RAYS
IMPACT RESISTANT
FROST RESISTANT

POSATA
SERIES

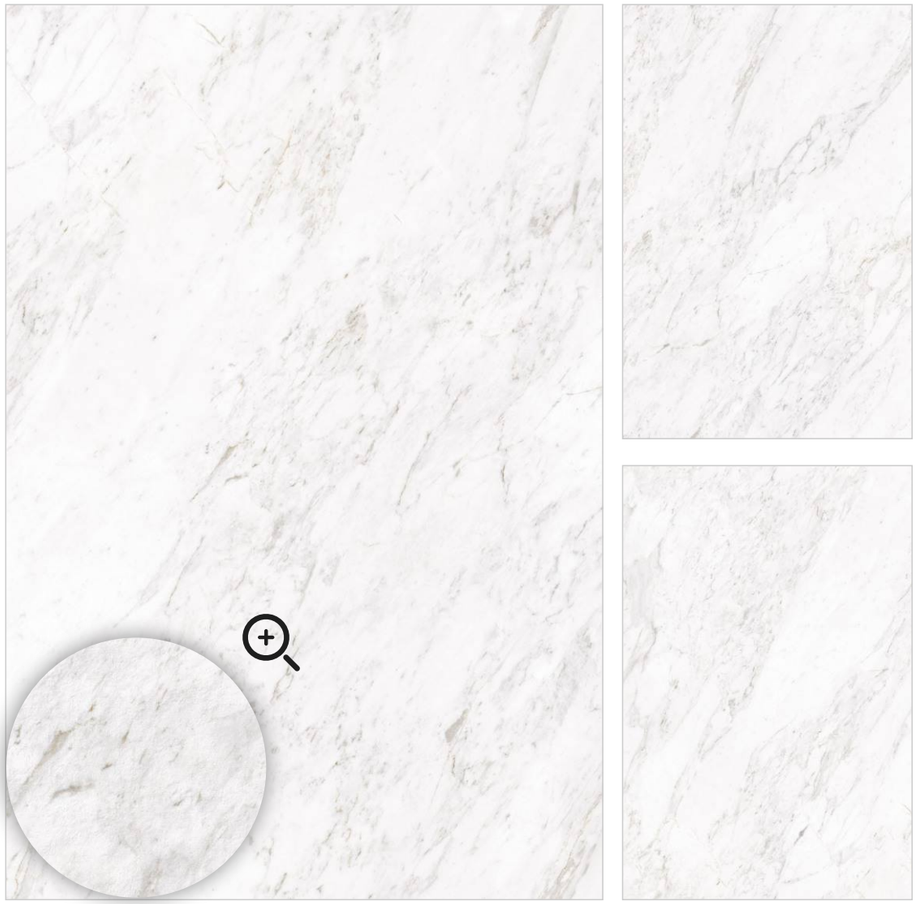


Tiles In Frame	Size	Finish	Thickness	Randoms
BERLIN ROCK STATUARIO	1200x 1800mm	Fab Surface	9mm	3

LIQUID REPELLENT
STAIN RESISTANT
SCRATCH RESISTANT
FIRE RESISTANT
RESISTANT TO UV RAYS
IMPACT RESISTANT
FROST RESISTANT





ROSATA
SERIES

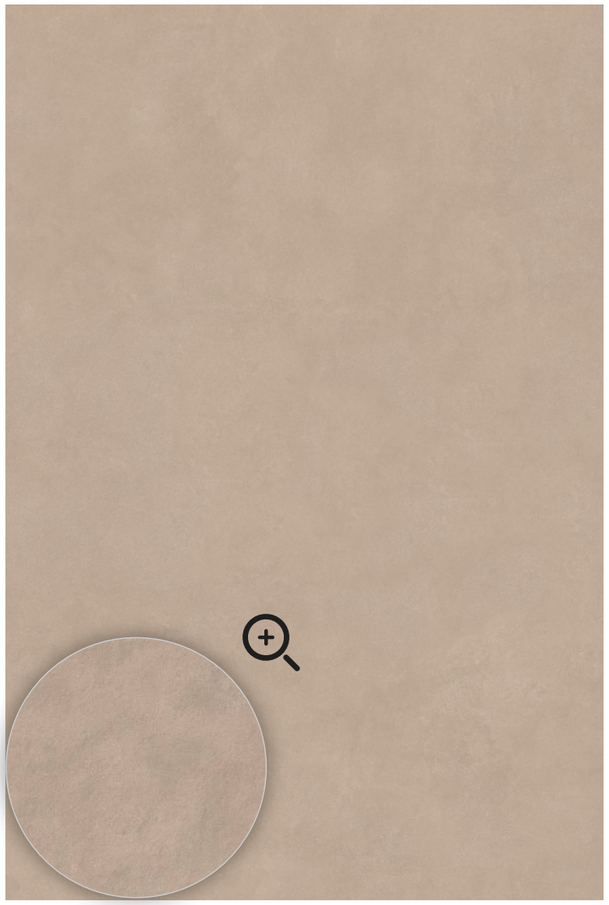





Click To Open 360 View


Tiles In Frame	Size	Finish	Thickness	Randoms
ROSATA AVORIO	1200x 1800mm	Fab Surface	9mm	3

LIQUID REPELLENT
STAIN RESISTANT
SCRATCH RESISTANT
FIRE RESISTANT
RESISTANT TO UV RAYS
IMPACT RESISTANT
FROST RESISTANT




VANITY FAIR 100 YEARS

ROSATA
SERIES

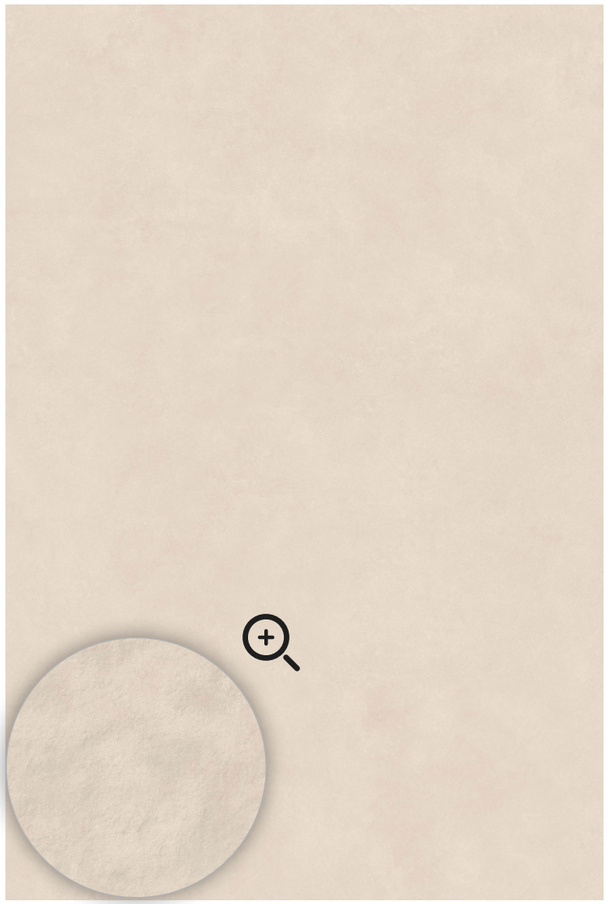

Click To Open 360 View


Tiles In Frame	Size	Finish	Thickness	Randoms
ROSATA TUSK	1200x 1800mm	Fab Surface	9mm	3

LIQUID REPELLENT
STAIN RESISTANT
SCRATCH RESISTANT
FIRE RESISTANT
RESISTANT TO UV RAYS
IMPACT RESISTANT
FROST RESISTANT




Reception

ROSATA
SERIES

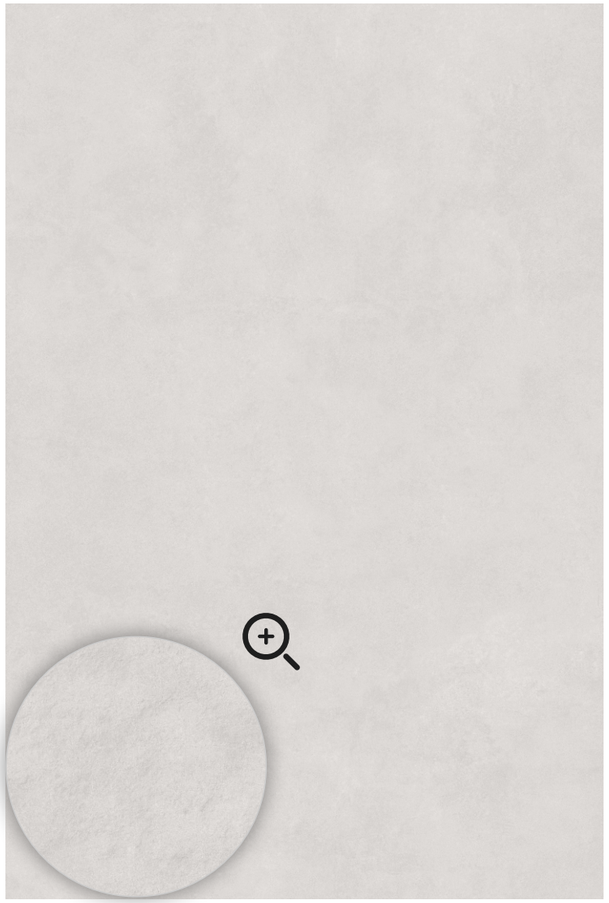

Click To Open 360 View


Tiles In Frame	Size	Finish	Thickness	Randoms
ROSATA BIANCO	1200x 1800mm	Fab Surface	9mm	3


LIQUID REPELLENT
STAIN RESISTANT
SCRATCH RESISTANT
FIRE RESISTANT
RESISTANT TO UV RAYS
IMPACT RESISTANT
FROST RESISTANT





HOSPITAL

ROSATA
SERIES

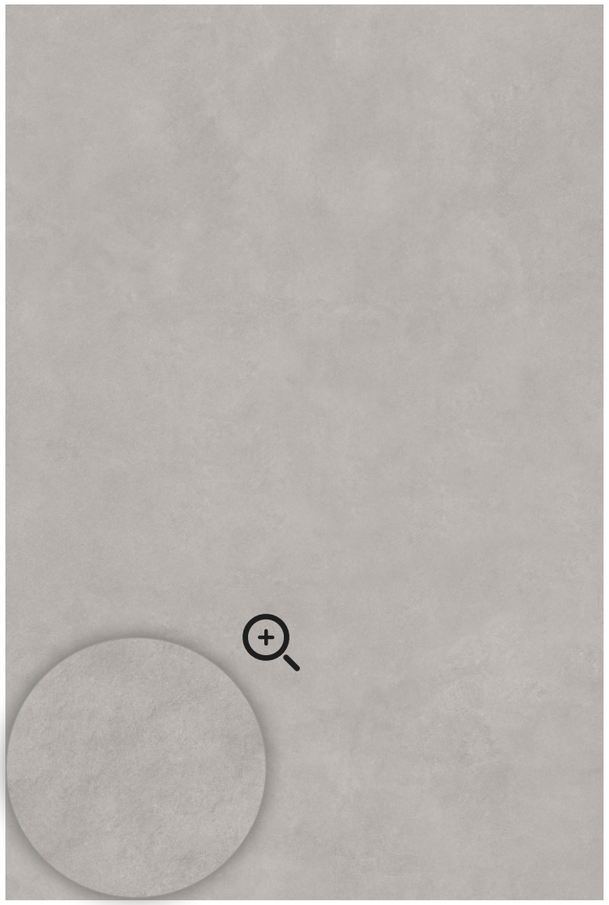

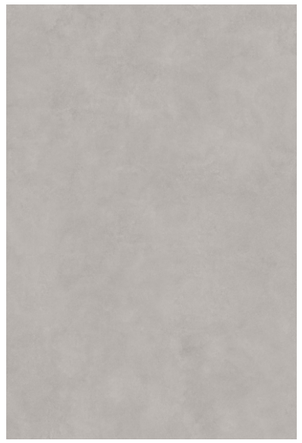

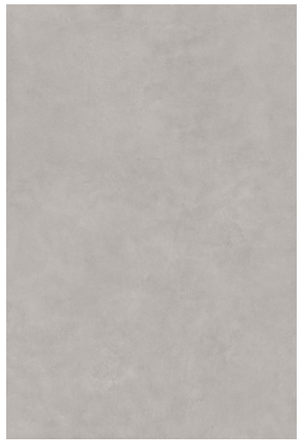

Click To Open 360 View


Tiles In Frame	Size	Finish	Thickness	Randoms
ROSATA GREY	1200x 1800mm	Fab Surface	9mm	3


LIQUID REPELLENT
STAIN RESISTANT
SCRATCH RESISTANT
FIRE RESISTANT
RESISTANT TO UV RAYS
IMPACT RESISTANT
FROST RESISTANT




RECEPTION

ROSATA
SERIES

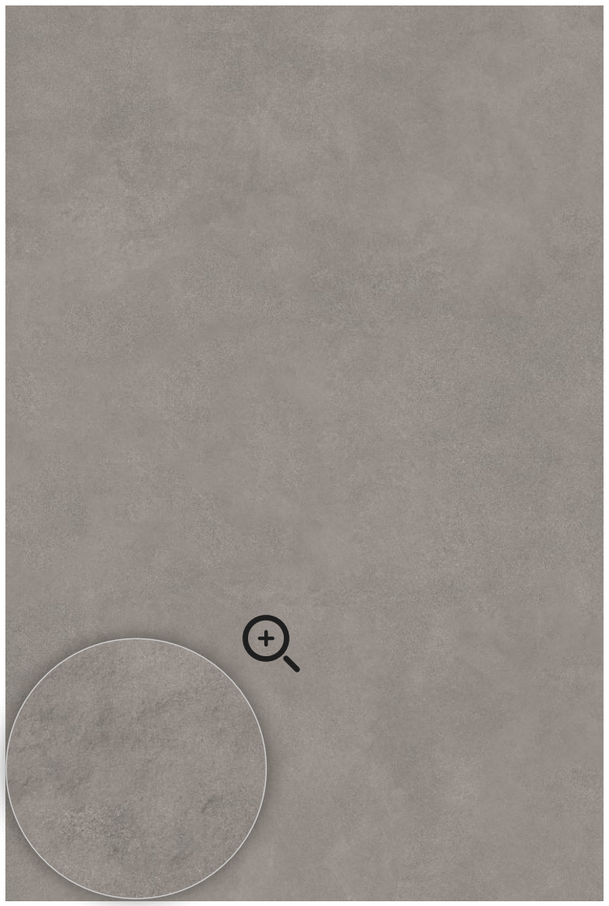

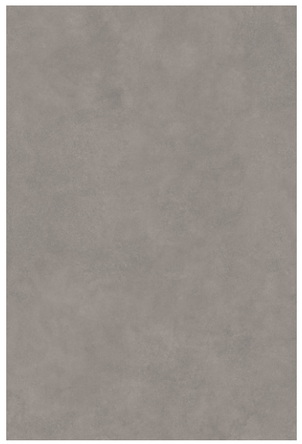



Click To Open 360 View

Tiles In Frame	Size	Finish	Thickness	Randoms
ROSATA GRIS	1200x 1800mm	Fab Surface	9mm	3


LIQUID REPELLENT
STAIN RESISTANT
SCRATCH RESISTANT
FIRE RESISTANT
RESISTANT TO UV RAYS
IMPACT RESISTANT
FROST RESISTANT






General Indication For Handling, Cutting And Laying


Handling

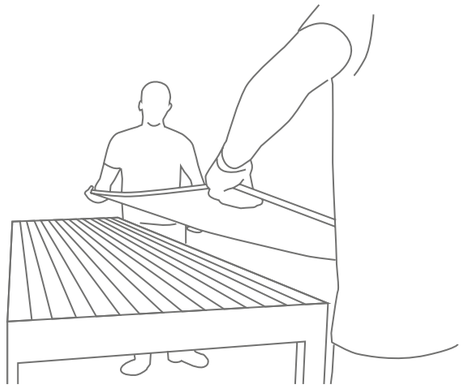


Where possible, mechanical lifting systems should be used for delivering slabs above the ground floor.

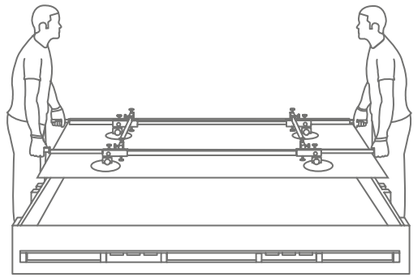


Handling the slabs on the floor can be managed with the aid of a frame fitted with suction cups to make the slabs more stable.

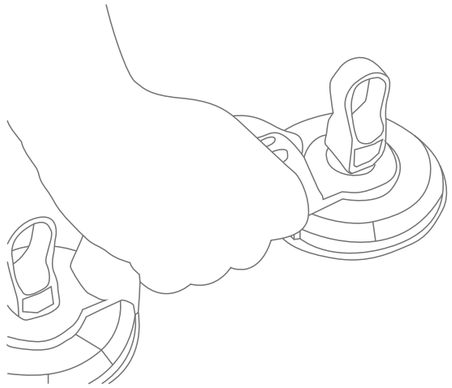


The appropriate suction cups may be used for manual handling.

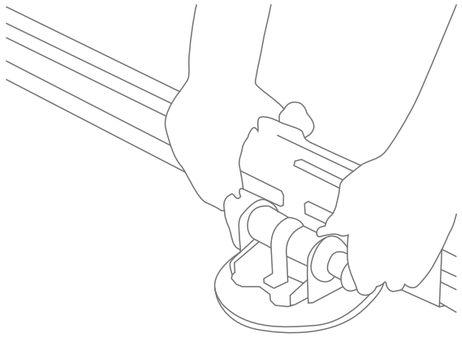

To facilitate handling of slabs with textured surfaces, the appropriate suction cups should be used.

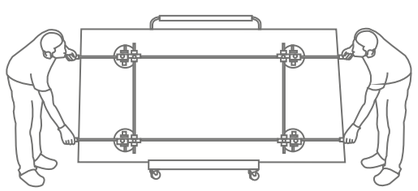


For moving the slabs over large surfaces, a forklift can be used.

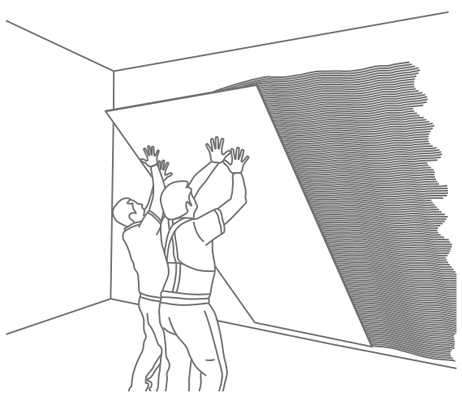


Once the slab is in position, excess air should be removed completely by tapping it either manually or mechanically using the appropriate trowel, starting from the centre and moving out towards the sides.


Cutting

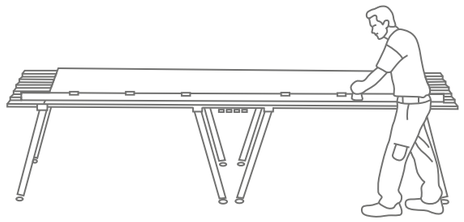


Cutting operations should be carried out on a perfectly stable, flat surface.

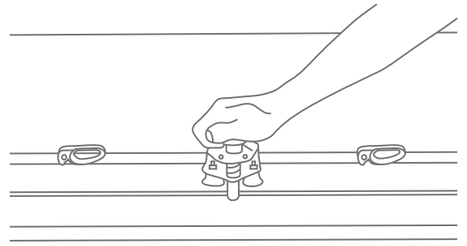


A cutting guide fitted with a diamond tip tool is recommended.

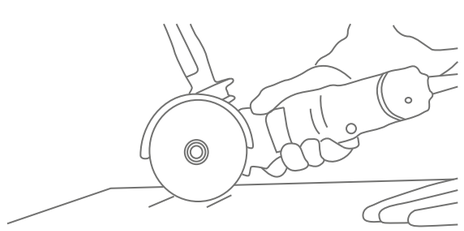


To cut the slab without breaking the material, the appropriate shears should be used.

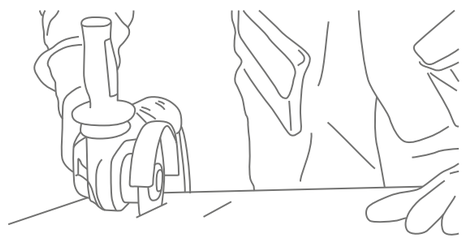

The slabs can also be cut with a dry saw or wet saw with a diamond wheel cutter.

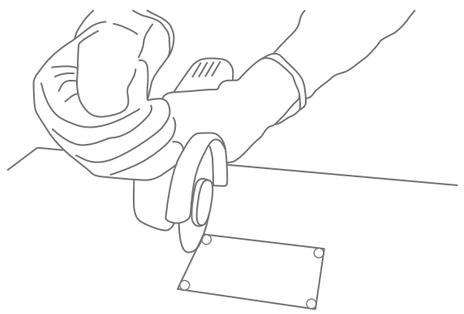

For L-shaped cuts or cuts inside the slab, holes should be bored at the vertices to prevent the blade of the cutting disk damaging the surface.

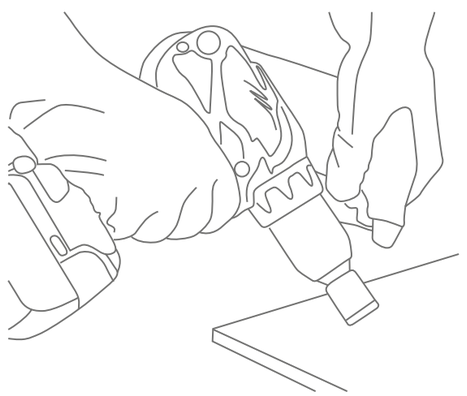

To bore cylindrical holes on the slabs, a diamond cutting tool of the desired diameter should be used, and the surface should be kept wet constantly.

TECHNICAL SPECIFICATION

TEST DESCRIPTION	TEST METHOD	ISO STANDARD 13006 B1a TILES	VALUE
Length and width	BS EN ISO 10545-2	± 0.6%	± 0.3%
Thickness	BS EN ISO 10545-2	± 5.0%	± 3.0%
Straightness of sides	BS EN ISO 10545-2	± 0.5%	± 0.3%
Rectangularity	BS EN ISO 10545-2	± 0.6%	± 0.3%
Surface flatness	BS EN ISO 10545-2	± 0.5%	± 0.3%
Water absorption	BS EN ISO 10545-3	≤ 0.5%	≤ 0.05%
Breaking strength	BS EN ISO 10545-4	≥ 1300N	≥ 1500N
Modulus of rupture	BS EN ISO 10545-4	≥ 35 N/mm^2	≥ 45N/mm^2
Resistance to deep abrasion	BS EN ISO 10545-6	≤ 175mm^3	≤ 150mm^3
Linear thermal expansion	BS EN ISO 10545-8	≤ 9 x 10^{-8} $°C^{-1}$	≤ 7 x 10^{-6} $°C^{-1}$
Thermal shock resistance	BS EN ISO 10545-9	No visible defect	No visible defect
Frost resistance	BS EN ISO 10545-12	Frost proof	Frost proof
Resistance to chemicals	BS EN ISO 10545-13	No visible effect	No visible effect
Resistance to stain	BS EN ISO 10545-14	Manufacturer to state class	Stains removed Min. Class 2
Colour resistance	BS EN ISO 10545-16	No damage	No damage
Colour resistance to UV Light	DIN 51094	No change in color	No change in color
Scratch hardness(MOH's Scale)	EN 101	≥ 6 MOHS	≥ 7 MOHS
Surface quality	BS EN ISO 10545-2	Min. 95%	No visible defect
Skid resistance (friction co-efficient)	BS EN ISO 10545-17	> 0.4	>0.4
Moisture Expansion	-	Nil	Nil

10+
Year Of Experience

200+
Unique Designs

40+
Export Countries

PACKING DEATILS

Size	Pcs / Box	Weight (Approx)	Thickness (Approx)	SQ. / Box
1200x1800	2	90 kg	9mm	46.50

stylographicshub.com

